

**Exterior**




**Dimensions & Weight**



Height: 27 mm  
 Width: 129 mm  
 Length: 218 mm  
 Weight: 750 g

**Ports**

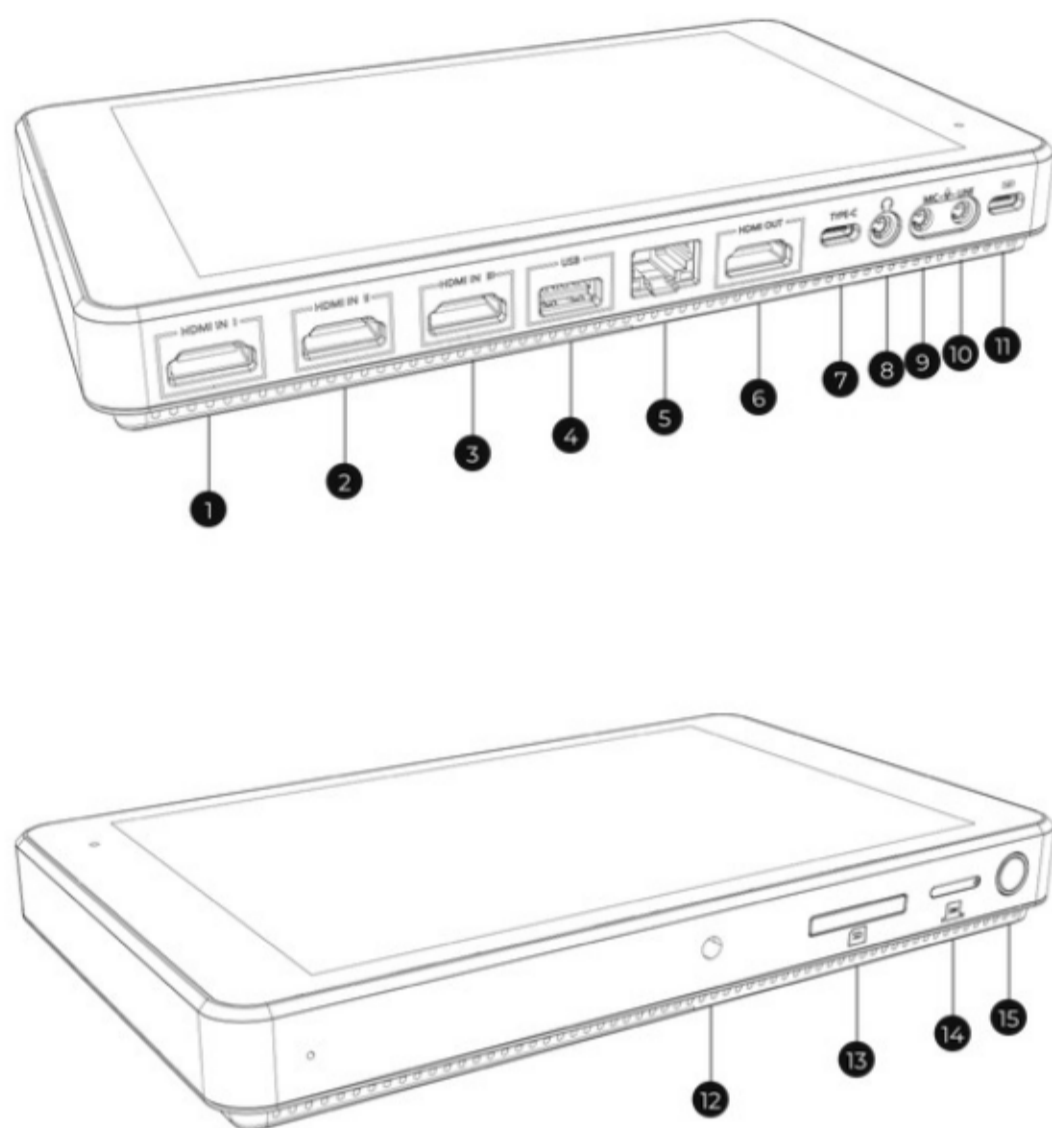

- 1 HDMI IN 1: Video input
- 2 HDMI IN 2: Video input
- 3 HDMI IN 3: Video input
- 4 USB IN: Video input  
(Please note in some usb webcams, only video can be captured)
- 5 Ethernet: Connect to Internet by Ethernet cable
- 6 HDMI OUT: Video output
- 7 TYPE-C 3.0: A fully functional interface supports input
- 8 AUDIO OUT: Connect with 3.5mm monitor headphones
- 9 MIC IN: Mono, connect to microphone for recording
- 10 LINE IN: Stereo, connect to electric guitar or synthesizer
- 11 TYPE-C: Power connector
- 12 1/4" Screw Hole: Mount YoloBox Pro with camera
- 13 Insert SD card as video sources (video & PDF) & for recording
- 14 SIM Card Slot: Insert SIM Card to connect to Internet
- 15 Power Button: Turn on and turn off

**Encoded Format**

Video Encoded Format: H.264  
 Audio Encoded Format: AAC (44.1k)  
 Video Recorded format: MP4  
 Audio Input Format: 32kHz/44.1kHz/48kHz/16-bit/16kHz  
 Video Input Format: 1080i/ 720p/ 1080p  
 Live Broadcast Resolution: 540P/720P/1080P

**Video Storage**

Storage Card Type: SD Card  
 Storage Card Capacity: Expanded to 128G in FAT32 Format

**Network Connection**

WiFi: 2.4G/5G  
 4G Network Countries & Frequency Band For  
 Users: [NA: Variant for North America (US/Canada/Mexico) ]  
 B2/B4/B5/B7/B12/B13/B14/B17/B25/B26/B41/B66/B71  
 Notes: Mexico B4  
 For Non-US/Canada/Mexico Users: (EM:Variant for EMEA/India/Korea/Taiwan/South Asia/Latin America/Australia/New Zealand) Users:  
 B1/B2/B3/B4/B5/B7/B8/B20/B28/B38/B39/B40/B41  
 Notes: Thailand B7  
 Please note that the YoloBox complete machine certification corresponds to the mainstream frequencies and wavelengths of the local mainstream telecom operators.  
 SIM Card Size: Nano card

**Power**

Power Interface: Type C, Quick Charge 3.0  
 Battery Capacity: 10000mAh  
 Rated Voltage: 5V-3A; 9V-2A; 12V-1.5A

**Transmission**

Network Protocol: RTMP(S)

**Working Environment**

Operating Temperature: -10°C-40°C  
 Storage Temperature: 5°C-40°C